



Aluminum Single Barrel Connector, One Hole Mount



- Material Aluminium
- Surface eletro tinned plated
- Bolts aluminium



Product Ref.	Conductor Range (Al. or Cu.)		DIMENSIONS IN mm & (inches)					
	MAX	MIN.	J	D	G	E (Bolt Hole)	F	
CSBC	4 STR	14 AWG	27.00 (1.10)	12.70 (0.50)	5.95 (0.23)	1/4	2.40 (0.09)	
CSBC	2 STR	14 AWG	29.40 (1.15)	12.70 (0.50)	7.55 (0.29)	1/4	2.75 (0.10)	
CSBC	1/0 STR	14 AWG	37.10 (1.46)	15.90 (0.62)	11.10 (0.43)	1/4	4.70 (0.18)	
CSBC	2/0 STR	14 AWG	37.10 (1.46)	15.90 (0.62)	11.10 (0.43)	1/4	4.70 (0.18)	
CSBC	250 KCMIL	6 STR	50.60 (2.00)	21.75 (0.85)	12.75 (0.50)	5/16	6.40 (0.25)	
CSBC	300 KCMIL	6 STR	50.60 (2.00)	21.75 (0.85)	11.90 (0.46)	5/16	6.40 (0.25)	
CSBC	350 KCMIL	6 STR	57.15 (2.25)	28.60 (1.12)	12.70 (0.50)	3/8	6.40 (0.25)	
CSBC	500 KCMIL	4 STR	71.50 (2.81)	38.10 (1.50)	19.05 (0.75)	3/8	8.00 (0.31)	
CSBC	600 KCMIL	2 STR	81.00 (3.19)	38.10 (1.50)	20.60 (0.81)	3/8	11.10 (0.43)	
CSBC	800 KCMIL	300 KCMIL	85.70 (3.37)	44.50 (1.75)	22.20 (0.87)	5/8	12.70 (0.50)	
CSBC	1000 KCMIL	500 KCMIL	85.70 (3.37)	44.50 (1.75)	22.20 (0.87)	5/8	12.70 (0.50)	

Aluminium Double Barrel Connector, One Hole Mount

- Material Aluminium
 Surface eletro tinned plated
 Bolts aluminium

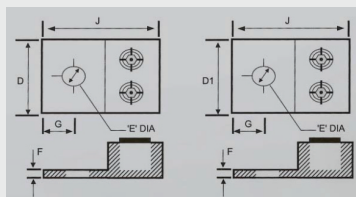

Product Ref.	Conductor Range (Al. or Cu.)		DIMENSIONS IN mm & (inches)					
	MAX	MIN.	J	D	G	E (Bolt Hole)	F	
CDBC	1/0 STR	14 AWG	37.10 (1.46)	30.95 (1.22)	11.10 (0.43)	1/4	4.70 (0.18)	-
CDBC	2/0 STR	14 AWG	37.10 (1.46)	31.75 (1.25)	10.70 (0.42)	1/4	4.70 (0.18)	-
CDBC	250 KCMIL	6 STR	65.10 (2.56)	41.70 (1.64)	22.20 (0.87)	3/8	6.40 (0.25)	38.1 (1.50)
CDBC	350 KCMIL	6 STR	73.00 (2.87)	48.60 (1.91)	22.20 (0.87)	1/2	6.40 (0.25)	44.8 (1.76)
CDBC	600 KCMIL	2 STR	81.00 (3.19)	61.10 (2.40)	15.90 (0.62)	1/2	11.10 (0.43)	50.4 (1.98)
CDBC	800 KCMIL	300 KCMIL	85.70 (3.37)	80.90 (3.18)	22.20 (0.87)	5/8	12.70 (0.50)	50.4 (1.98)
CDBC	1000 KCMIL	500 KCMIL	85.70 (3.37)	80.90 (3.18)	22.20 (0.87)	5/8	12.70 (0.50)	-